


# nifty

# 120

## TRAILER MOUNTED ACCESS PLATFORM



**12.33m (40ft 5in)**  
Working Height

**5m (16ft 8in)**  
Working Outreach

**Weight Saving  
Chassis Design**  
Easily towed and  
manoeuvred on site

**Bi-Energy Power  
Available**  
Optimising utilisation

**Fully Proportional  
Hydraulic Controls**  
Designed for maximum  
operator efficiency

**Telescopic Axle**  
Access through double  
doorway openings



[niftylift.com](http://niftylift.com)



# nifty 120

The Nifty 120 is one of the most robust and versatile trailer mounts available. Its telescopic axles allow it to pass through double doorway openings and setting up is simple with a choice of manual or hydraulic outriggers. Operation is quick, easy, and reliable hydraulic controls make it an ideal alternative to ladders and scaffolds.

## Safety Features

- ▶ Pressure sensitive outriggers with interlocks & audible alarm
- ▶ Dual controls (platform & base)
- ▶ Emergency descent system with hand-pump
- ▶ Lock valves on all hydraulic cylinders
- ▶ Overrun brake system with gas spring handbrake
- ▶ CE Mark





Retractable axles allow the Nifty 120 to pass through a 1.10m (3ft 6in) wide opening.

Both cost effective and simple to set up, the Nifty 120 comes as standard with manual outriggers.



To save time and energy when setting up, the Nifty 120 is also available with hydraulic outriggers.

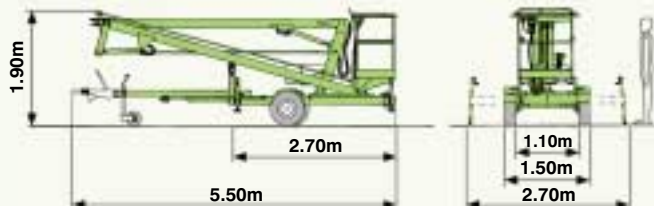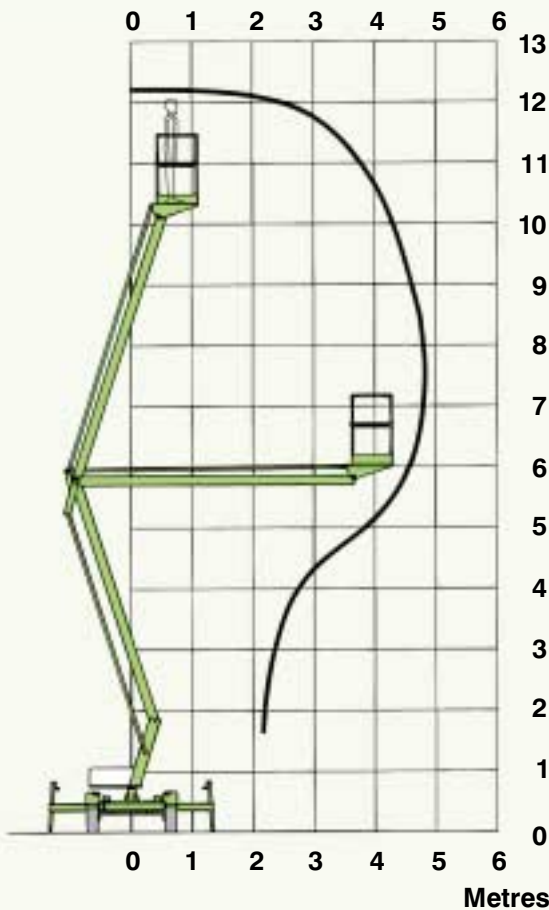

## Specifications

<b>Working Height</b>	12.33m	40ft 5in
<b>Platform Height</b>	10.33m	33ft 10in
<b>Working Outreach</b>	5m	16ft 8in
<b>Slew</b>	360°	
<b>Travelling Width</b>	1.50m	4ft 11in
<b>Working Width</b>	2.70m	8ft 11in
<b>Axles Retracted</b>	1.10m	3ft 6in
<b>Height Stowed</b>	1.90m	6ft 3in
<b>Overall Length</b>	5.50m	18ft
<b>Weight</b>	1160kg	2552lbs
<b>Platform Capacity</b>	200kg	440lbs
<b>Platform Size</b>	1.10m x 0.65m	3ft 8in x 2ft 1in
<b>Control Systems</b>	Fully proportional hydraulic controls	
<b>Power Options</b>	Bi-Energy (engine and battery) Mains only Battery only Petrol or diesel engine only	

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms

**Niftylift Ltd**  
Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England  
www.niftylift.com  
e.mail: info@niftylift.com  
Tel: +44 (0)1908 223456  
Fax: +44 (0)1908 312733

